


Pre-Welded Female Thread Tanker Bottom Valve Mounting Flange (Tank Truck Bottom Valve Welding Sump)



4 inch Welding Sump

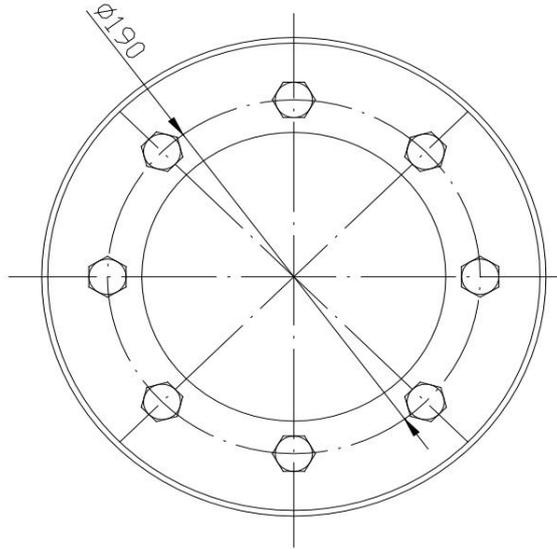

4 inch Welding Sump

This series of Tank Side Female Nut Flange / Welding Sump is specially designed for mounting bottom valves (in compliance with EN13308 / TTMA standard) onto fuel tanker bodies. It ensures a secure, leak-proof, and stable connection between the bottom valve and the tank structure. Welded directly to the tank bottom outlet, providing a solid base for bottom valve installation. Ideal for fuel tankers, chemical trailers, and other hazardous liquid transport vehicles.

Technical Specifications:

Item No.: **HBBVTSFL-100RA (4 inch)**

Item No.: **HBBVTSFL-80RA (3 inch)**

Item No.: **HBBVTSFL-150RA (6 inch)**

Name: Tank Side Female Nut Flange / Welding Sump

Nominal size: 4 inch, 3 inch & 6 inch for option

Material: Carbon Steel or Stainless Steel for option

Nuts: Welded to the Flange (regular item do not including bolts & washers)

Nut Quantity: 8 pre-welded nuts for 4 inch Flange

6 pre-welded nuts for 3 inch Flange

HBBVTSFL-100RA is used for 4 inch **EN13308 standard** Bottom Valve tank side connection

HBBVTSFL-80RA is used for 3 inch **EN13308 standard** Bottom Valve tank side connection

HBBVTSFL-150RA is used for 6 inch **EN13308 standard** Bottom Valve tank side connection

Key Features

Application: For connecting EN13308 standard Bottom Valves to fuel tankers

Design: Nuts are pre-welded to the flange (Bolts & washers are not included or included for option)

Material Options: Carbon Steel / Stainless Steel (for corrosion resistance of chemical liquid tank)

Suitable for EN13308 standard 3", 4" & 6" bottom valves.

High precision machining ensures tight seal and easy valve alignment.

Note: Feel free to contact us for more specifications or custom requirements. Custom material and sizes available upon request