


Add:Bali Village Qiaoxia Town, Yongjia County, Wenzhou City, Zhejiang Province, China.

Real Product and In-Field Application Image:



RFMOW-1150 Two-Piece 16-Sided HDPE Manhole Well (Tank Sump) with Inward Flange

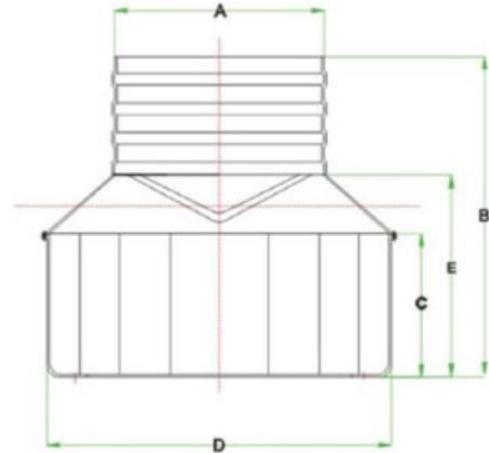

It is designed for fuel stations and underground piping systems requiring high flexibility and durability. The two-piece structure allows for separate installation of the upper and lower parts, making it ideal for complex or limited-space environments. Made of high-strength HDPE, it offers excellent chemical resistance, sealing performance, and long service life. The modular design also simplifies transportation and on-site adjustments, while enabling easy maintenance and partial replacement when needed.

Technical Specifications:

Material: High-Density Polyethylene (HDPE)

Installation Method: Inward Flange Type

Flange Bolt Hole Center-to-Center Distance: 1150 mm, adjustable as needed.

Bolt Holes: Usually 32 holes with 13mm diameter; Customizable on request.

Body Outer Diameter (D): 1420 mm

Body Inner Diameter: 1400 mm

Neck Outer Diameter(A): 850 mm

Neck Inner Diameter: 830 mm

Pipe Connection Section Height (C): 580 mm

Total Height(B): 1300 mm

Shape: Regular 16-sided polygon

Wall Thickness: 10 mm, Other thickness Customizable on request.

Color: Green, White, Black Grey etc. Custom colors and logo engraving available upon request.