


Durable Brass Double-Poppet Foot Valve for Fuel Suction Systems

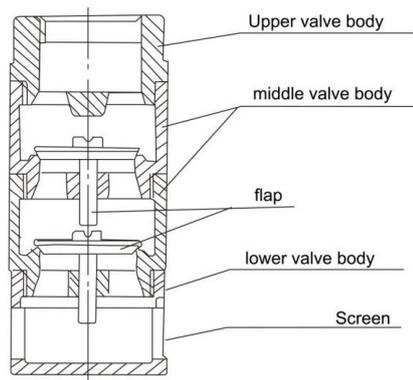

Materials:

Main Body: Brass

Valve Disc: Brass

Seals: Buna-N or Viton

Valve closing speed: 0.5S

Medium: Gasoline, diesel, or kerosene

Operating Temperature: $-30^{\circ}\text{C} \sim +55^{\circ}\text{C}$

HBD Series of Foot Valves are installed on the bottom of suction tubes in the fuel storage tank. Double-poppet models provide more protection with metal-to-metal sealing arrangements. They are recommended for using on suction lines where the pressure does not exceed 34 ft of head (approximately 15 psi). All our Foot Valves are 100% pressured tested to ensure the quality. The bottom Screen protects the valve from debris.

Specifications:

Product #	Size	Brass Poppet
HBD-25	BSP1 or NPT1	Double
HBD-32	BSP1.25 or NPT1.25	Double
HBD-40	BSP1.5 or NPT1.5	Double
HBD-50	BSP2 or NPT2	Double
HBD-80	BSP3 or NPT3	Double
HBD-100	BSP4 or NPT4	Double